
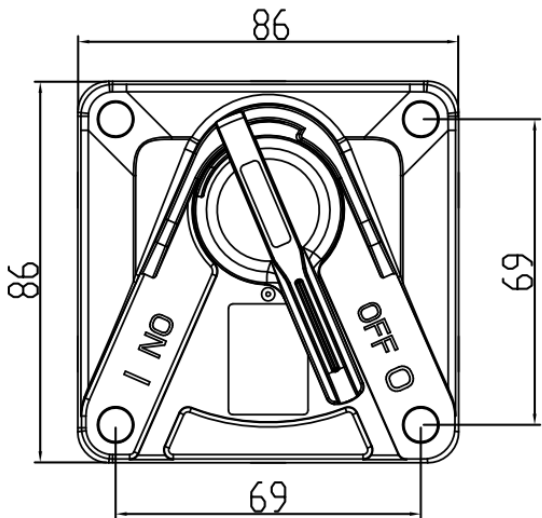



PRODUCT / RANGE:	4Cabling Industrial Weatherproof Switches	
Models	040.000.0225 040.000.0226 040.000.0227 040.000.0242 040.000.0244 040.000.0245 040.000.0246 and 040.000.0247	
Measurements	86 x 86 x 86 mm	
Type	W/P switch	
Operating Voltage / Rating Current	040.000.0225 250V 16A M100 50Hz 040.000.0226 250V 20A M100 50Hz 040.000.0227 250V 35AX M100 50Hz 040.000.0242 250V 10AX M100 50Hz 040.000.0244 250V 10AX M100 50Hz (2 Pole) 040.000.0245 250V 16AX M100 50Hz (2 Pole) 040.000.0246 250V 20A M100 50Hz (2 Pole) 040.000.0247 250V 35AX M100 50Hz (2 Pole)	
Usage	Industrial areas subject to wash-down; outside	
IP Rating	IP66	

ASSEMBLY STEPS – SURFACE MOUNT METHOD


1. Remove the four screws and the cover. See the diagram below.

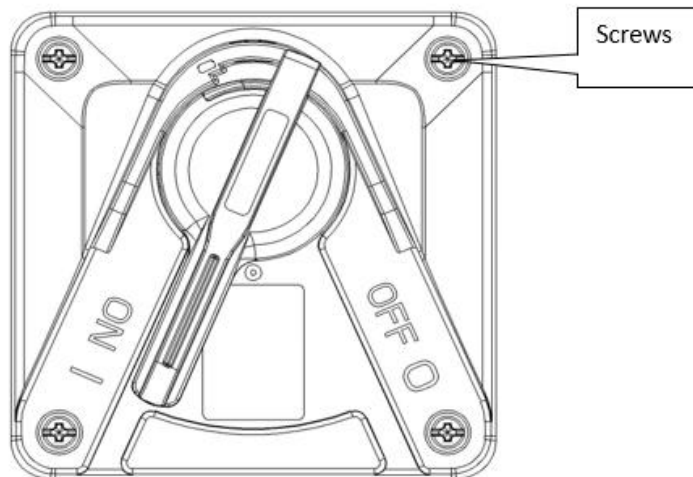


2. Install the base as below, tightening the four screws and using glue to seal.

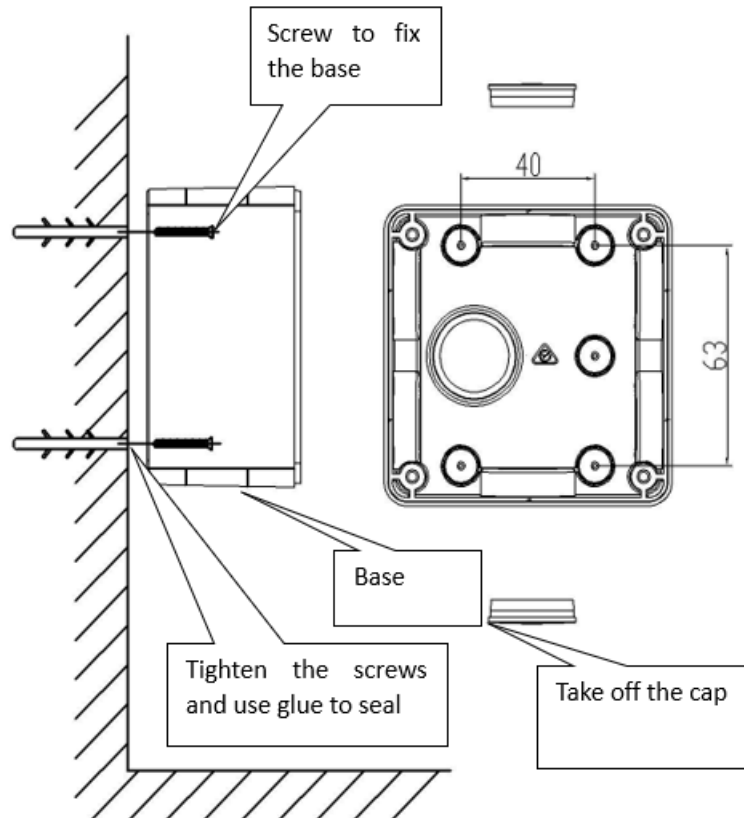


3. Strip the wire of the connection end and load end, as below.

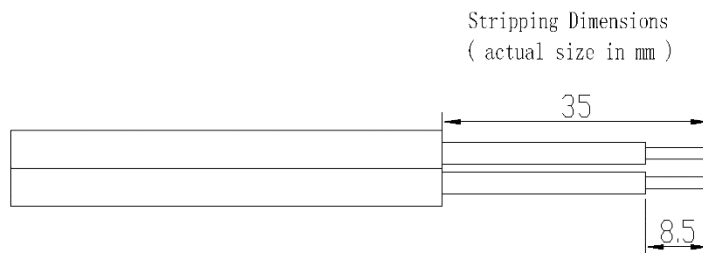

4. Wire as indicated below. Please note that the 'line' marking is the connection end, and the 'load' marking is the load end. **Connection end "L" must match load side "L"**.

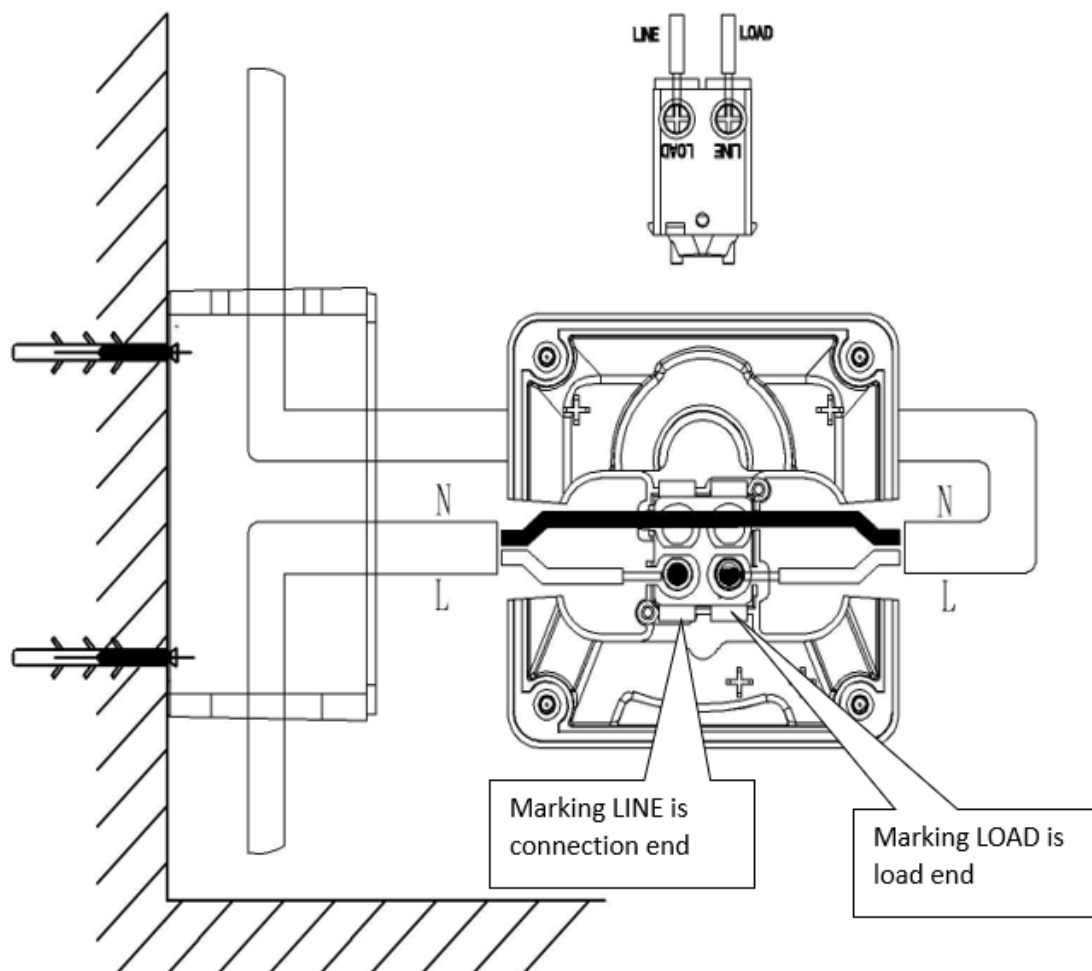

5. Ensure the wiring is correct, then ensure the switch handle is in the 'off' position. Place the top cover, screw on the screw caps, and use glue to seal the cable entrance holes.

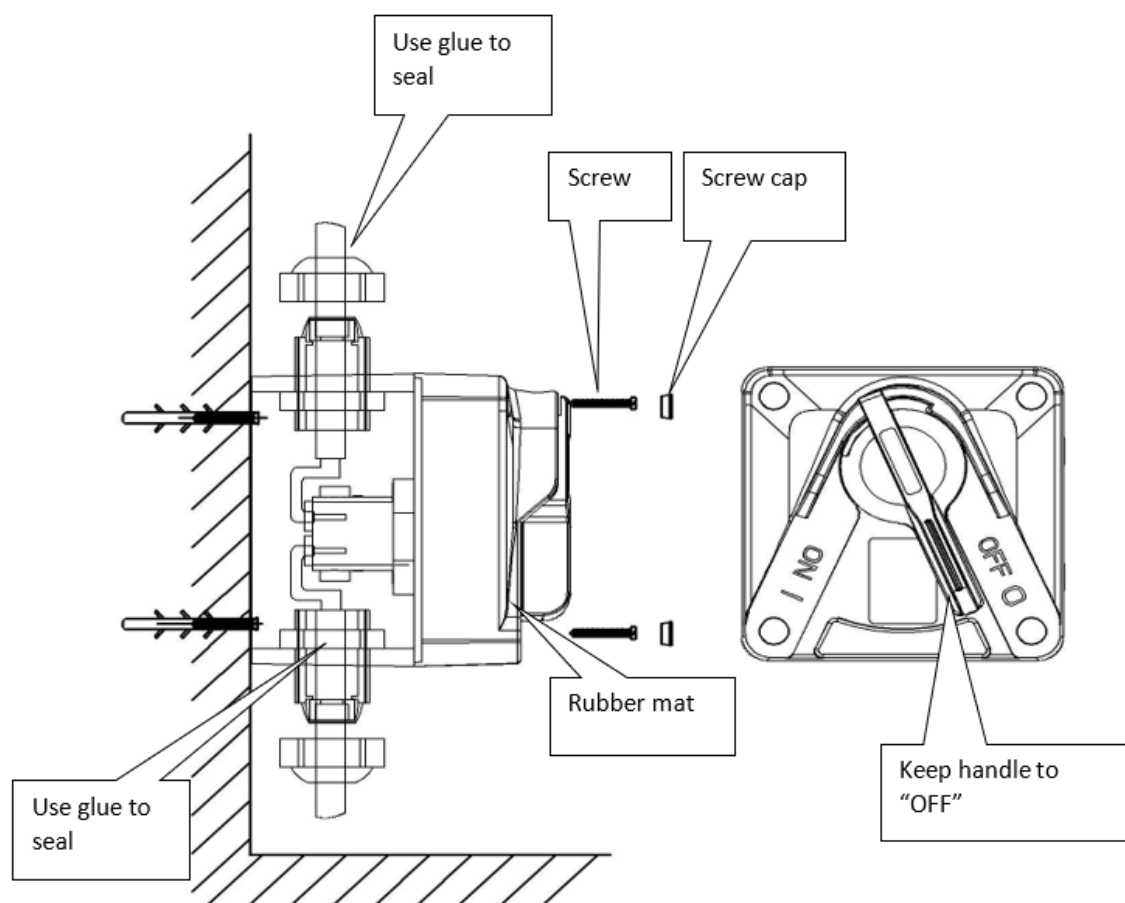

TROUBLESHOOTING GUIDE

ISSUE	POSSIBLE REASONS	SOLUTIONS
The switch is on but doesn't work	Poor wiring connection	Check the wiring. Tighten the 'line' end and 'load' end.
works when the switch indicates 'off'; doesn't work when switch indicates 'on'.	Incorrect wiring	Check and correct the wiring. The 'line' should be at the connection end, and 'load' at the load end. The line end must match the load end.

Disclaimers:

- This product must be installed by a licensed electrician.
- Avoid direct product contact with corrosive liquids and gases, such as alkaline, acid, and paint, as these will cause damage to the product.
- This product cannot be repaired; do not attempt to repair this product. If the product is faulty, it should be disposed of safely.
- This product should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.
- The material of this product may vary in colour from batch to batch. Colour matching from one batch to another cannot be guaranteed.
- Electrical installations periodically receive transient over voltages; this product has been designed to minimise the effect of such voltages on the connected equipment. However, please note that this product may not give full protection for extreme overvoltage transients, such as those resulting from a close lightning strike.
- Cable wiring of different voltage systems, such as Low Voltage and SELV cables, cannot share the same conduit.
- This product must be installed and used as per these instructions.
- This product utilises intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of 4Cabling in all cases.
- 4Cabling reserves the right to modify the specification of this product at any time.