



Switch on to the

4CABLING

SURFACE SWITCHES

INDUSTRIAL SERIES



The 4Cabling Industrial Surface Switch Series is IP66-certified, suitable for outdoor and warehouse use, available in 1-, 2- or 3-pole and with a choice of voltage.

KEY FEATURES

- Available in 10A - 32A options
- Grey colouring suited to industrial environments
- Enclosures made from PVC to ensure they can be solvent bonded to standard electrical PVC conduit accessories.
- Switches with padlocking facility to ensure extra security
- 3-year warranty
- High local stock levels
- Fast delivery across Australia

SPECIFICATIONS

- IP66 rated to protect against dusty and wet environments
- UV rated to protect against harsh and direct sunlight
- Temperature resistance from -25°C to +50°C providing suitability for harsh Australian conditions
- Captive stainless steel combination head screws to provide corrosion resistance and simplified installation
- 1 x 32mm and 2 x 25mm cable entry to enclosure
- Compliances:
AS/NZS 3133:2013/A2:2016
AS/NZS 3100:2017+A1:2017

APPLICATION

- Most suitable for industrial environments, indoors and outdoors where protection from dust and water is needed

4CABLING
QUALITY PRODUCTS FOR A CONNECTED WORLD

WWW.4CABLING.COM.AU • 1300 855 235 • SALES@4CABLING.COM.AU



Switch on to the




4CABLING

SURFACE SWITCHES

INDUSTRIAL SERIES



PART #	POLES	VOLTAGE (Vac)	CURRENT (Amp)	AC RATING	M RATING	NOMINAL CONDUCTOR SIZE (MM ²)
040.000.0134	1 Pole	250	20	AC22	150	2.5
040.000.0136	2 Pole	500	20	AC22	150	2.5
040.000.0137	2 Pole	500	32	AC22	180	6.0
040.000.0138	3 Pole	500	10	AC22	100	1.0
040.000.0139	3 Pole	500	20	AC22	150	2.5
040.000.0140	3 Pole	500	32	AC22	180	6.0

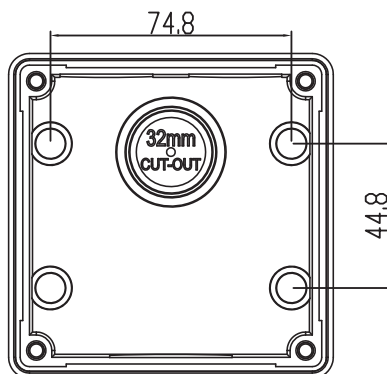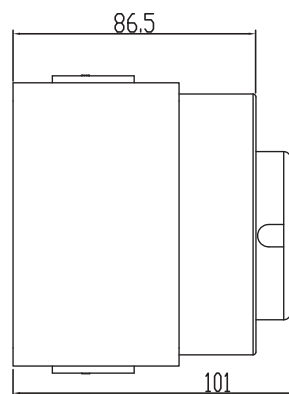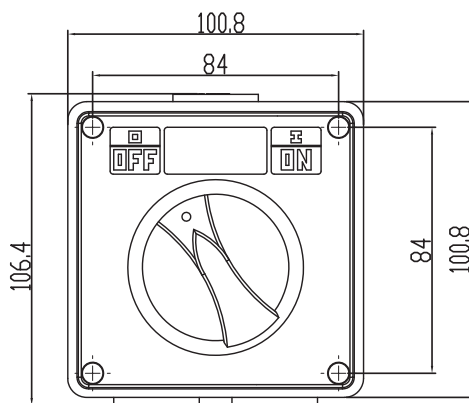

4CABLING
QUALITY PRODUCTS FOR A CONNECTED WORLD

SEE OUR ENTIRE RANGE

4cabling.com.au/4c-industrial.html

WWW.4CABLING.COM.AU • 1300 855 235 • SALES@4CABLING.COM.AU