
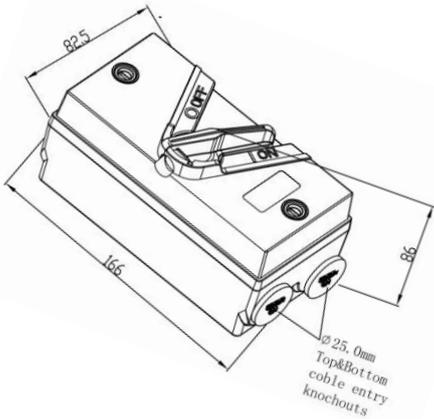




PRODUCT / RANGE:	4Cabling Industrial Isolator Switch	
Models	040.000.0228 – 040.000.0234 and 040.000.0248 – 040.000.0252	
Measurements	166 x 86 x 82.5 mm	
Type	Weatherproof Isolator Switch	
Operating Voltage / Rating Current	040.000.0228 250V 20A M180 (1P) 040.000.0229 250V 35A M180 (1P) 040.000.0230 250V 20A M180 (2P) 040.000.0231 250V 35A M180 (2P) 040.000.0232 250V 20A M180 (3P) 040.000.0233 250V 35A M180 (3P) 040.000.0234 250V 63A M180 (3P) 040.000.0248 250V 63A M180 (1P) 040.000.0249 250V 63A M180 (2P) 040.000.0250 250V 20A M180 (4P) 040.000.0251 250V 35A M180 (4P) 040.000.0252 250V 63A M180 (4P)	
Usage	Industrial areas subject to wash-down; outside	
IP Rating	IP66	

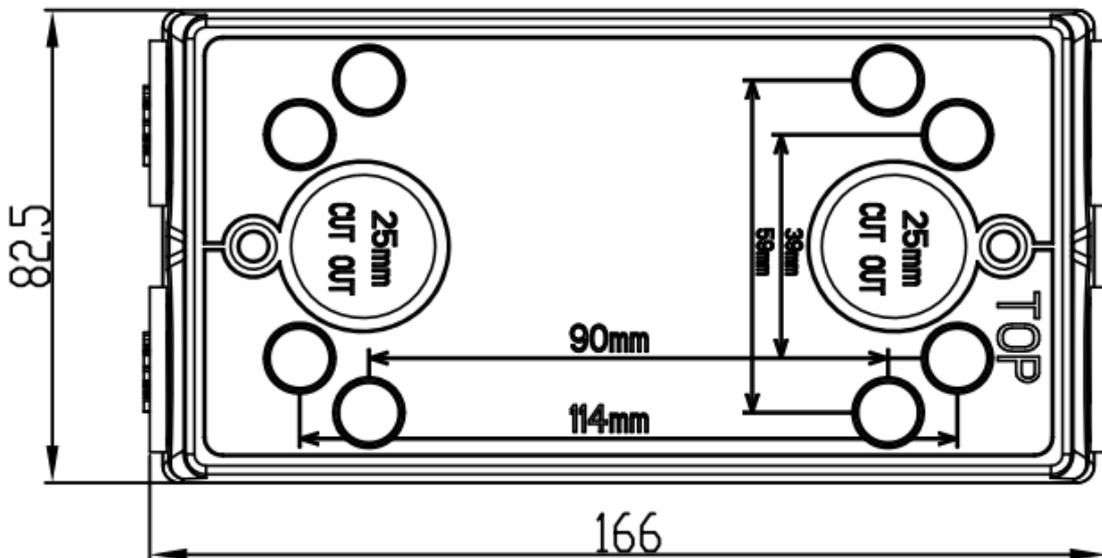

NOTES

- It is important that prior to installation or maintenance the user/installer disconnects the supply before commencing work.
- The installer must take the necessary precautions to ensure that the IP rating of the unit is maintained at the required level.
- Incoming conduit thread and conduit cap must be wrapped with Teflon tape or using the glue before installation to prevent ingress of water
- All the terminals must be tightened to the correct torque value. Not more than 3Nm
- The total current stated on the label of the unit must not be exceeded.

INFORMATION FOR INSTALLATION

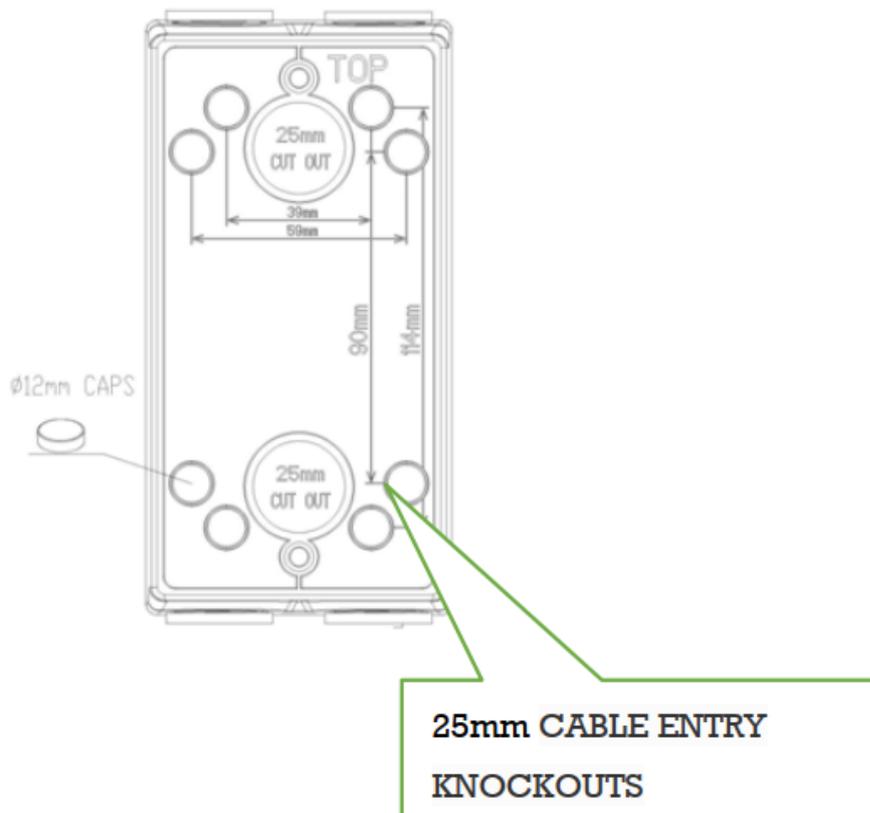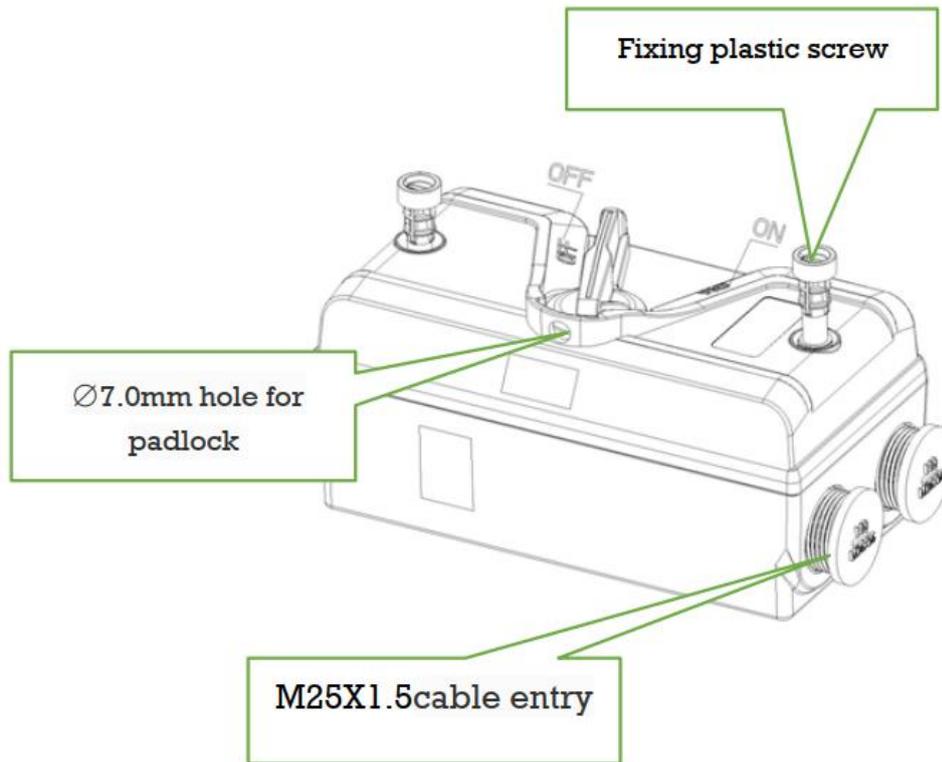

LOCKING FACILITY

Ø7.0mm hole to lock in “OFF” position with padlock having hasp up to Ø6.5mm

EXTRA PROTECTION

When used as mounting holes, 8xØ12mm insulation caps are supplied for covering the mounting screws, as an added protection against the seepage of water.

TERMINAL CABLE CAPACITY

Maximum-16mm² rigid standard cable

10mm² flexible cable with ferrules

Disclaimers:

- This product must be installed by a licensed electrician.
- Avoid direct product contact with corrosive liquids and gases, such as alkaline, acid, and paint, as these will cause damage to the product.
- This product cannot be repaired; do not attempt to repair this product. If the product is faulty, it should be disposed of safely.
- This product should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.
- The material of this product may vary in colour from batch to batch. Colour matching from one batch to another cannot be guaranteed.
- Electrical installations periodically receive transient over voltages; this product has been designed to minimise the effect of such voltages on the connected equipment. However, please note that this product may not give full protection for extreme overvoltage transients, such as those resulting from a close lightning strike.
- Cable wiring of different voltage systems, such as Low Voltage and SELV cables, cannot share the same conduit.
- This product must be installed and used as per these instructions.
- This product utilises intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of 4Cabling in all cases.
- 4Cabling reserves the right to modify the specification of this product at any time.