


Mini DisplayPort Male to HDMI® Male Cable

Supports 4K@60Hz as specified in HDMI 2.0

This mini DisplayPort 1.4 Male to HDMI Male Cable converts a mini DisplayPort device for use with a monitor/ screen device with a female Type-A HDMI connector. The cable support high video resolutions that go up to 4K@60Hz as specified in HDMI 2.0.

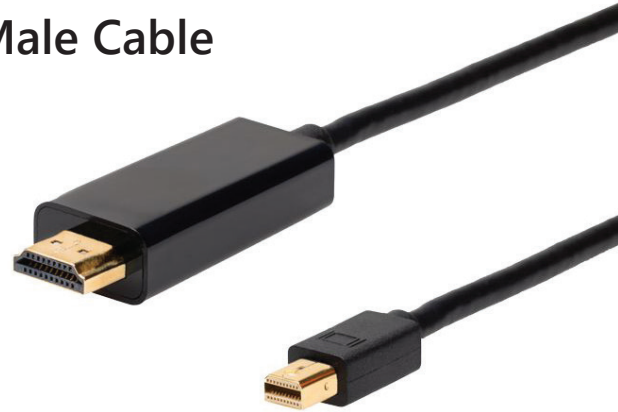

KEY FEATURES

- RoHS and REACH Compliant
- 4Cabling mini DisplayPort to HDMI cable is made from an oxygen-free 28AWG, fully shielded construction with 24K gold-plated corrosion resistant connectors.
- Increase Multi-Stream Transport (MST) resolution to enable simultaneous use of two 4K UHD monitors.
- Forward Error Correction – FEC addresses the transport error resiliency needed for compressed video transport to external displays.
- Increased display resolution while also facilitating HDR
- HDR metadata transport, inherent in the DisplayPort standard, provides support that is useful for DP to HDMI 2.0a protocol conversion. It also provides a flexible

metadata packet transport for future dynamic HDR standards.

- Expanded audio transport – This spec extension covers capabilities such as 32 audio channels, 1536kHz sample rate, and the inclusion of all known audio formats.
- 3-year warranty

SPECIFICATIONS

- **Colour:** Black
- **Video Supports:** Input: DisplayPort 1.4; 1.3; 1.2; 1.1
DisplayPort 1.4 and 4 lanes, 4K2K @120Hz at RGB or 4:4:4, 8bit
Output: HDMI 2.0; 1.4; 1.2
HDMI resolution 4K2K @60Hz at RGB or YCbCr 4:4:4
3D Video Formats
HDCP Repeater (if source support)

HDR (High Dynamic Range) Imaging

- **HDMI Max. Data Rates:** 18Gbps
- **Supported Audio:**
8 Channel LPCM
Dolby Digital AC-3
DTS
High Bit Rate (HBR) Audio Format (if source support)
- **Operating Temperature:** -20°C to 75°C

APPLICATION

- This is a passive cable, the use is limited. The DisplayPort must be the source and HDMI to be on the output side.



GITC APPROVED

CONNECT & COLLECT LOCATIONS



17/31 Maddox Street
Alexandria NSW

17/428 Old Geelong Road
Hoppers Crossing VIC 3029


12/58 Metroplex Ave
Murarrie QLD 4172

www.4cabling.com.au • 1300 855 235 • sales@4cabling.com.au



Mini DisplayPort Male to HDMI® Male Cable


Supports 4K@60Hz as specified in HDMI 2.0

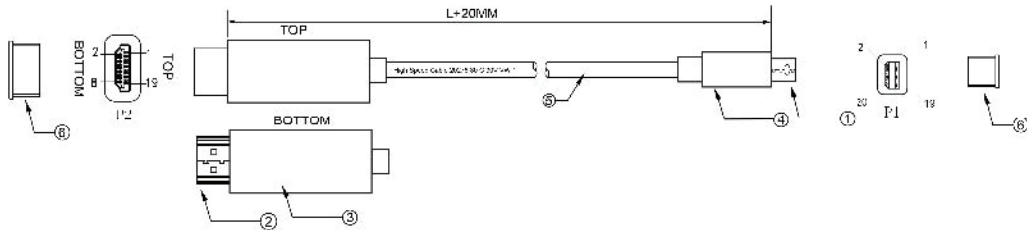

NO #	PARTS	SPECIFICATION STANDARD			
1	Connector A	Type: Mini DisplayPort Male	Pin: Gold Plated	Shell: Gold Plated	
2	Connector B	Type: A HDMI Male	Pin: Gold Plated	Shell: Gold Plated	
3	Outer Mould	Black ABS			
4	Outer Mould	PVC, Black			
4	Cable	32AWG [(32AWG*1P)+D+AM]*5pcs + 32AWGX4C+AM+ALMG+PVC			
		Material: Copper	Jacket Material: PVC	Colour: Black	Overall Diameter: 5.0 ± 0.1mm

LENGTHS AVAILABLE

022.002.0460	1m
022.002.0461	1.5m
022.002.0462	2m
022.002.0463	3m

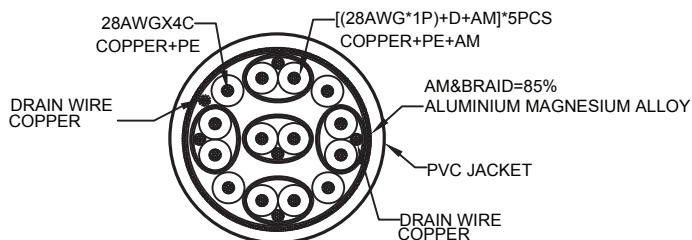

GITC APPROVED

CONNECT & COLLECT LOCATIONS



17/31 Maddox Street
Alexandria NSW

17/428 Old Geelong Road
Hoppers Crossing VIC 3029

12/58 Metroplex Ave
Murarrie QLD 4172

www.4cabling.com.au • 1300 855 235 • sales@4cabling.com.au