



# CAT6 RJ45 24 port patch panel Universal Termination (110/KATT) with individual jacks

Patch Panels are the backbone of a structured cabling solution and we understand the importance of installing quality products.

Unique to 4Cabling, these Keystone Jack patch panels provide a fast and simple way to terminate CAT6 Solid UTP Cable. With the built-in cable management and write-on labels, organizing your cabinet will no longer be a hassle.

The main advantage of using the Keystone Jack Patch Panels is that the outlets are easily replaceable so if an outlet gets damaged there is no need to replace the entire patch panel - simply replace the individual jack.


## Application

Used to terminate CAT6 structured cabling systems in a 19" comms cabinet



## Features

- 24 x CAT6 Keystone Jacks
- T-568A or B Wiring
- Can be terminated using both a KATT & 110 Tool
- Patented dust covers to protect unused ports from dust and damage
- Provides termination for 22 - 26 AWG
- Cable Management lacing supplied with the panel

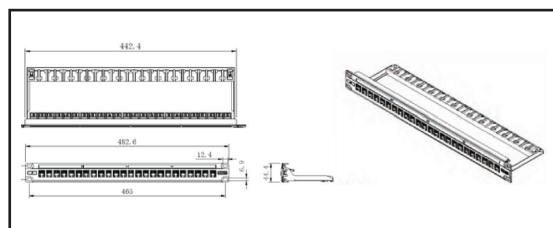

GITC APPROVED

## CONNECT & COLLECT LOCATIONS

4/201 Parramatta Road,  
Homebush West NSW 2140

17/428 Old Geelong Road  
Hoppers Crossing VIC 3029

2/1277 Lytton Road  
Hemmant QLD 4174

1/9 Collingwood Street  
Osborne Park WA 6017



### Technical Specifications

- CAT6 24-port patch panel matches & exceeds CAT6 350MHZ connectin hardware specifications, complies with Gigabit Ethernet applications
- Unique PCB circuit board design reduces EMI/RFI interference
- High strength die-casted zinc alloy Shielding design meets the industry shielding standards
- Solid & corrosion phosphor bronze DC ensures over 250 terminations
- Termination caps prevent wire from dropping off
- With 50µ " gold plate, durability is rated to 1500 matching recycles
- Backward compatible with CAT5e



Size	1RU
Material	Metal
Colour	Powder-Coated Black
Dimension	482.6cm x 125cm x 44.4cm
Resistance (MAX)	100mΩ
Resistance (MIN)	500mΩ

### Approvals & Certifications

- TIA/EIA 568-B-2.1 ISO/IEC 11801
- EN 50173-1:2002
- Australian Approved AS/CA S008:2010

