



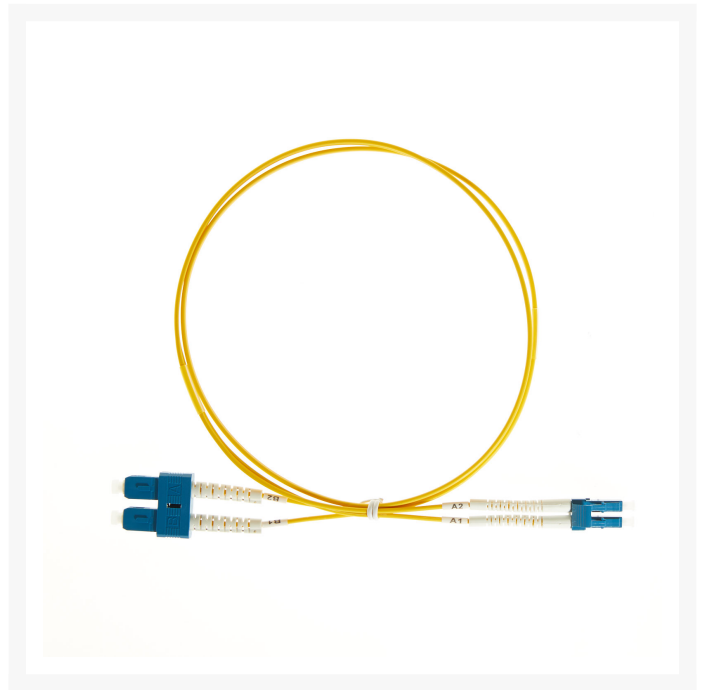

5m LC-SC Flexi Boot OS1/OS2 Singlemode Fibre Optic Cable

Product Images

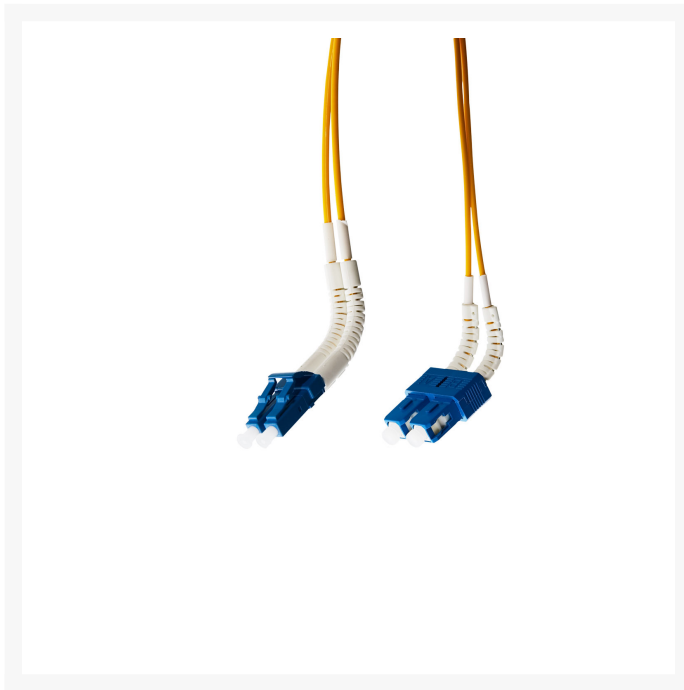

Description

5m LC-SC Flexi Boot OS1/OS2 Singlemode Fibre Optic Cable

4Cabling range of Flexi-Boot Fibre optic cables offers a unique approach to cable management. These specialised boots are designed to bend from closer to the connector and stay in the bent position by way of a specialised wire. This ingenious boot is used to keep fibre patch leads clean and organised and set back from rack doors and other external factors that can tap on a fibre lead until its ultimate destruction.

Optical fibre cables are the thin, flexible fibres of glass that carry telephone conversations and emails all over the world in a matter of seconds with much less interference than copper cables. Fibre-Optic cables need less amplification to boost signals so they travel better over longer distances.

4Cabling's OS1 / OS2 Flexi Boot Singlemode Fibre Optic Patch Leads provide the connection for high speed and legacy networks like Gigabit Ethernet, Fast Ethernet and Ethernet and is immune to EMI/RFI. They are mainly used on patch panels for the connection between outlets and terminal equipment. The singlemode optical fibre cables are manufactured using LSZH cables which conform to IEC, EIA TIA and Telcordia standards.

2mm OVERSLEEVING. UPC (Ultra Physical Contact) Connector

FEATURES

- Conforms to ISO/ IEC 11801
- Individually labelled for lead tracing
- Low smoke zero halogen (LSZH) cable
- Manufactured with stringent quality control
- UPC (Ultra Physical Contact) connector
- All leads are supplied with a factory test report
- OS2 fibre patch leads conform to ITU-T G.652.D, TIA/EIA 492CAAB
- Duplex configurable assemblies for LC, SC, ST & SC/A, as well as MTRJ Patch leads
- All ends are polished and individually inspected for correct polishing
- Supports high-speed multi-channel data, voice & video applications

SPECIFICATIONS

- **Mode:** OS1/OS2 Singlemode
- **Fibre Termination:** LC Flexi Boot - SC Flexi Boot
- **Length:** 5m
- **Colour:** Yellow
- **Oversleeving:** 2mm

APPLICATIONS

- Termination enclosure to equipment patching
- Equipment to equipment patching
- Cross-connect patching

WARRANTY

3-years limited warranty

