



## Socomec NeTYS PE 650VA Tower UPS

### Product Images



### Description

The NeTYS PE 650VA Tower UPS is line Interactive and the ideal way to protect IT applications at home, the office, or in retail environments when the input power source or mains power fails. Perfect for CAD and graphics workstations, multimedia peripherals, LCD screens, monitors and Point of Sale systems. This unit provides 15 minutes of back-up time, see the Technical Data sheet below for details on the differences between each model.

#### FEATURES


- Cost-effective way to protect SOHO or POS applications.
- Easy to use control panel with graphical LCD/LED monitor.
- Protect from network power cuts and voltage fluctuations.
- Integrated AVR to stabilise output voltage, avoid drops when switching to battery.
- Simple connection: IEC 320 sockets for IT peripherals.
- Integrated NTP protection for LAN/ADSL connection against the risk of data line overvoltage.

#### SPECIFICATIONS

- Quasi Sinewave.
- 650VA.
- Tower only.
- USB comm's port and cable.
- Local View free software.
- Data line protection ports.

- 2 x 3 pin Aust output sockets.
- Includes 3 pin Australian input cord.

## CONNECTIONS

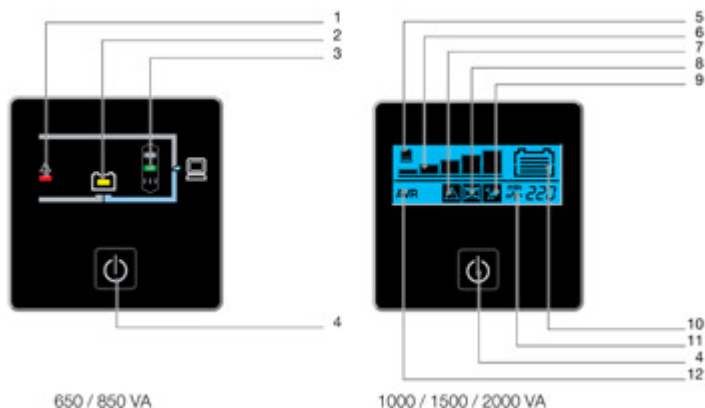

1. Output sockets
2. USB port
3. Mains input cable
4. Circuit breaker
5. NTP data line suppressor
6. Fan

## Control panel



1. Alarm
2. Operation with battery
3. Normal operation
4. On / Off
5. Load present
6. Load level (5 steps)
7. General Alarm
8. Battery fault / Replace the battery
9. Overload
10. Battery capacity
11. Normal mode / Battery mode (flashing)
12. Automatic Voltage / Regulation active

## TECHNICAL DATA

Sn [kVA]	650 VA	800 VA	1000 VA	1500 VA	2000 VA
Pn [kW] (0°C - 35°C)	360 W	480 W	600 W	900W	1200W
Input / output	1/1				
<b>Input</b>					
Mains voltage	177 V - 290 V				
Rated frequency	50 / 60 Hz with automatic selection				
Mains connection	Cable with plug				
<b>Output</b>					
Automatic Voltage Regulation (AVR)					
Rated voltage	230V ±10%				
Rated frequency	50/60 Hz				
Wave form	Step wave				
Protection	Overload, significant discharge and short circuit				
Sockets	650-850: 2 x Australian standard		1000-1500-2000: 4 x Australian standard		
<b>Batteries</b>					
Type	Sealed lead-acid maintenance free - expected life 3/5 years				
Back-up time <sup>(1)</sup>	15 Min	20 Min	45 Min	55 Min	60 Min
<b>Communication</b>					

Interface	USB				
Local communication software	Local View				
Telephone protection	NTP data line suppressor				
<b>UPS Cabinet</b>					
Dimensions (W x D x H) [mm]	100 x 290 x 145	145 x 345 x 165 mm	145 x 390 x 205 mm		
Weight	5.2 kg	6 kg	9.7 kg	11.2 kg	12 kg
<b>Standards</b>					
Safety	AS 62040-1				
EMC	AS 62040-2				
Product declaration	CE, C-Tick (N876)				

## Warranty

2-year limited warranty.

## WHY 4CABLING?

- Australia's leading importer & wholesaler of 19" server racks, copper, fibre & structured networking products
- ISO 9001, NSW Govt. & GITC (QLD Govt.) approved supplier
- Secure online shopping 24/7
- A loyal customer base of 100k+ who trust us for their data & electrical needs
- Over 3000 quality products in stock ready to go
- All products are approved as per local Australian standards
- Warranty & peace of mind return policy
- Lightning fast delivery nationwide
- Expert advice
- Proudly 100% Australian owned & operated

