




## 2m SC-SC OM1 Multimode Fibre Optic Cable | Salmon Pink

### Product Images

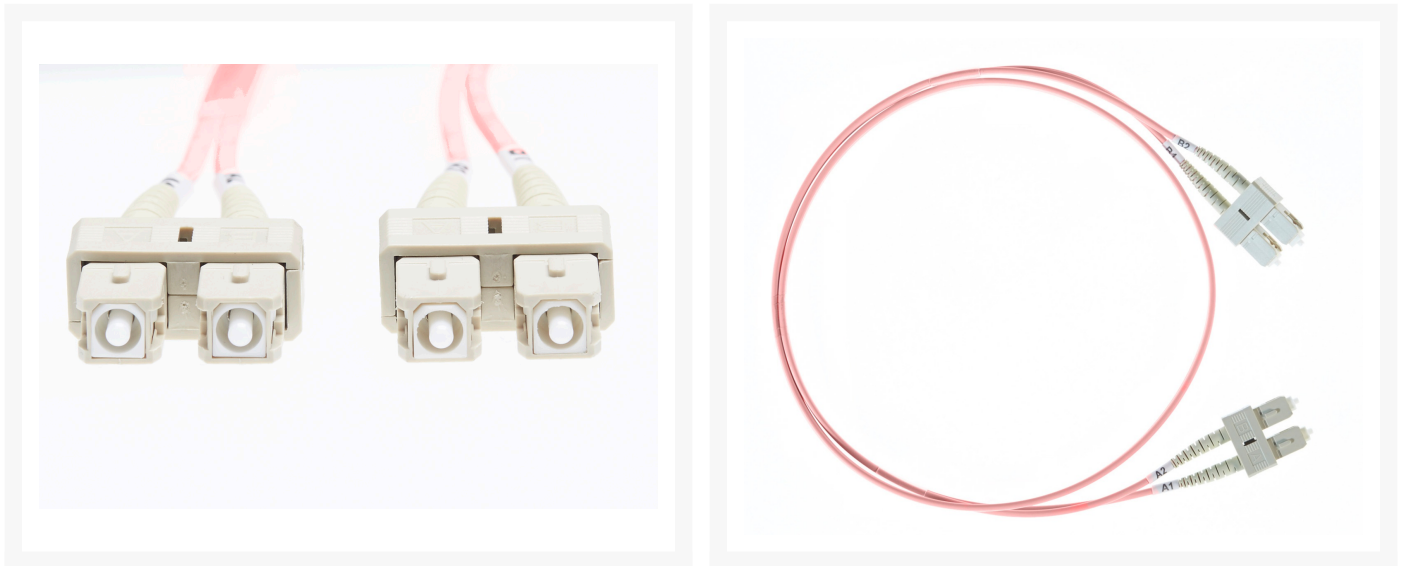

### Description

## 2m SC-SC OM1 Multimode Fibre Optic Cable | Salmon Pink

Fibre optic cables are the thin, flexible fibres of glass that carry telephone conversations and emails all over the world in a matter of seconds with much less interference than copper cables. Fibre-Optic cables need less amplification to boost signals so they travel better over longer distances.

4Cabling's SC-SC OM1 Multimode Fibre Optic Patch Leads provide connection for high speed and legacy networks like Gigabit Ethernet, Fast Ethernet and Ethernet and are immune to EMI/RFI. They are mainly used on patch panels for the connection between outlets and terminal equipment. The multimode optical fibre cables are manufactured using LSZH cables which conform to IEC, EIA TIA and Telecordia standards.

## FEATURES

- OM1, OM3, OM4 & OS1 fibre patch leads conform to ITU-651, TIA/EIA492AAAD
- Individually labelled for lead tracing
- Low smoke zero halogen (LSZH) cable
- Manufactured with stringent quality control
- All leads are supplied with a factory test report
- Duplex configurable assemblies for LC, SC, ST & SC/A, as well as MTRJ Patch leads

- All ends are polished and individually inspected for correct polishing
- Supports high speed multi-channel data, voice & video applications
- Conforms to ISO/ IEC 11801

## SPECIFICATIONS

- **Mode:** OM1 Multimode
- **Fibre Termination:** SC-SC
- **Length:** 2m
- **Colour:** Salmon Pink
- **Oversleeving:** 2mm

	Core/Cladding Diameter (µm)	Fast Ethernet 100BASEFX	1 Gigabit 1000BASE-SX	1 Gigabit 1000BASE-LX	10 Gigabit 10GBASE	40 Gigabit 40GBASE	100 Gigabit 100GBASE
<b>Multimode</b>							
OM1	62.5/125	2000 Meters	275 Meters	550 Meters	33 Meters	N/A	
OM2	50/125		550 Meters		82 Meters		
OM3*					300 Meters	100 Meters	100 Meters
OM4*					400 Meters	150 Meters	150 Meters
<b>Singlemode</b>							
OS1	9/125	2000 Meters	5 km at 1310nm	5 km at 1310nm	10 km at 1310nm		
* Laser Optimised							

	Core/Cladding Diameter (µm)	Fast Ethernet 100BASEFX	1 Gigabit 1000BASE-SX	1 Gigabit 1000BASE-LX	10 Gigabit 10GBASE	40 Gigabit 40GBASE	100 Gigabit 100GBASE
<b>Multimode</b>							
OM1	62.5/125	2000 Meters	275 Meters	550 Meters	33 Meters	N/A	
OM2	50/125		550 Meters		82 Meters		
OM3*					300 Meters	100 Meters	100 Meters
OM4*					400 Meters	150 Meters	150 Meters
<b>Singlemode</b>							
OS1	9/125	2000 Meters	5 km at 1310nm	5 km at 1310nm	10 km at 1310nm		
* Laser Optimised							

## APPLICATIONS

- Cross-connect patching
- Termination enclosure for equipment patching
- Equipment to equipment patching

## WARRANTY

3-years limited warranty

