




# Teltonika | TSW100 | 5 Port Industrial Unmanaged Gigabit Switch with 4 Port PoE+, Plug-N-Play

## Product Images

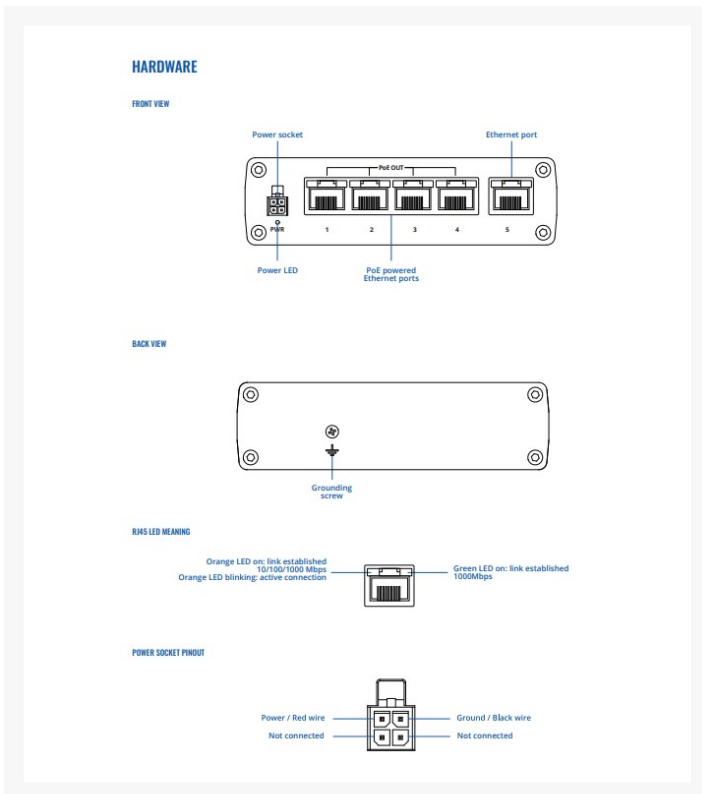

# Teltonika | TSW100 | 5 Port Industrial Unmanaged Gigabit Switch with 4 Port PoE+, Plug-N-Play

## Industrial Unmanaged PoE+ Switch

The TSW100 is the first industrial unmanaged switch from Teltonika Networks. TSW100 is equipped with five Gigabit Ethernet ports, four of which support IEEE802.3af and IEEE802.3at Power-over-Ethernet standards (PoE).

Classified as power source equipment (PSE), it centralizes the power supply, providing up to 30 watts per port and reducing installation effort. It has 10/100/1000 Mbps Ethernet ports to provide an economical high-bandwidth solution for your industrial Ethernet network.

This rugged unmanaged industrial switch is ideal for professional high bandwidth applications where it is necessary to provide both: reliable data connection and power supply.

## FEATURES

- Durable and Rugged aluminum housing
- Total power budget at PSE up to 120w
- 4 x PoE ports with 802.3af and 802.3at support
- Plug-N-Play with no additional configuration needed
- 5 x Gigabit Ethernet ports with speeds of up to 1000 Mbps

## SPECIFICATIONS

- **Ethernet LAN:** 5 x LAN ports, 10/100/1000 Mbps, compliance with IEEE 802.3, IEEE 802.3u, 802.3az standards, supports auto MDI/MDIX crossover
- **PoE ports:** Port 1- 4
- **PoE standards:** 802.3af and 802.3at
- **PoE Max Power per Port:** (at PSE) 30 W
- **Total PoE Power Budget:** (at PSE) 120 W
- **Bandwidth:** (Non-blocking) 10 Gbps
- **Packet buffer:** 128 KB
- **MAC address table size:** 2K entries
- **Connector:** 4 pin industrial DC power socket
- **Input voltage range:** 7-57 VDC
- **Input voltage range for PoE:** 44-57 VDC
- **Power consumption:** (idle/max no PoE/max) 2 W/9 W/129 W
- **Ethernet:** 5 x RJ45 ports, 10/100/1000 Mbps
- **Status LED's:** 1 x Power LED, 10 x LAN status LED's
- **Power:** 1 x 4 pin DC connector
- **Ground:** 1 x Grounding screw
- **Casing material:** Full aluminum housing
- **Dimensions:** (W x H x D) 115 x 32 x 95 mm
- **Weight:** 350 g
- **Mounting:** DIN rail or wall mounting (additional kit needed), flat surface placement
- **Operating temperature:** -40 °C to +75 °C
- **Operating humidity:** 10% to 90% non-condensing

# CONTENTS

- TSW100
- 65 W PSU
- QSG (Quick Start Guide)

## ACCESSORIES (Not included)

- Power Supply Unit:
  - [TT.PR2FK20M](#) | Power cable with 4-way screw terminal
  - [TT.PR2PL15B](#) | Power cable with 4-way open wire
  - [TT.PR2PD01B](#) | 4-PIN to barrel socket adapter
  - [TT.PR2AM20M](#) | Automotive 12/24V
- Mounting Options:
  - [TT.PR5MEC12](#) | Surface mounting KIT
  - [TT.PR5MEC11](#) | Compact 35mm DIN Rail KIT
  - [TT.PR5MEC00](#) | Large DIN Rail KIT

## WARRANTY

2-years limited warranty

