


## Teltonika | TSW114 | 5 Port Industrial DIN Rail Unmanaged Gigabit Switch, Plug-N-Play

#### **Product Images**





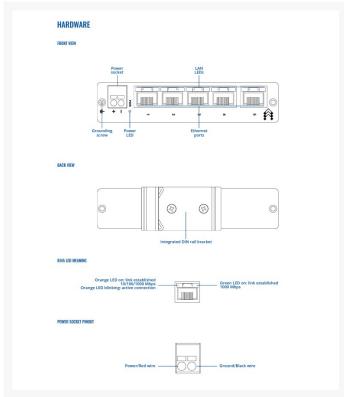

# Teltonika | TSW114 | 5 Port Industrial DIN Rail Unmanaged Gigabit Switch, Plug-N-Play

#### **Gigabit DIN Rail Switch**

The TSW114 is an affordable way to simplify your connectivity with its Plug-N-Play nature and 5 x Gigabit Ethernet ports that provide stable and reliable connectivity for high-bandwidth solutions. The switch has front-facing ports and an integrated DIN rail bracket to enable easy installation across many industrial environments - especially control cabinets.

#### **FEATURES**

- Easy Mounting: Integrated DIN rail bracket and front-facing ports
- Gigabit Ethernet: 5 x Gigabit Ethernet ports with speeds of up to 1000 Mbps
- Compact and Durable: Rugged anodized aluminum housing that fits in your pocket
- Plug and Play: No additional configuration is needed

### **SPECIFICATIONS**

- Bandwidth (Non-blocking): 10 Gbps
- Packer buffer: 128 KB
- MAC address table size: 2K entries
  Jumbo: Frame Support: 9216 bytes
- Connector: 2-pin industrial DC power socket
- Input voltage range: 9 30 VDC
- Passive PoE: Over spare pairs. Power up through LAN port, not compatible with IEEE802.3af, 802.3at and 802.3bt standards, Mode B, LAN1 Port, 9 50 VDC
- Power consumption Idle: 0.3 W / Max: 2.3 W
- **Ethernet**: 5 x RJ45 ports, 10/100/1000 Mbps
- Status LEDs: 1 x Power LED, 10 x LAN status LEDs
- Power: 1 x 2 pin industrial DC power socket
- Ground: 1 x Grounding screw
- Casing material: Anodized aluminum housing and panels
- **Dimensions**: 113.1 x 27.4 x 80.5 mm
- Weight: 174g
- Mounting options: Integrated DIN rail bracket, wall mounting (additional kit needed), flat surface placement
- Operating temperature: -40 C to 75 C
- Operating humidity: 10% to 90% non-condensing
- Ingress Protection Rating: IP30
- Compliance: IEEE 802.3, IEEE 802.3u, 802.3az standards, Supports auto MDI/MDIX crossover

### **CONTENTS**

- TSW114
- QSG (Quick Start Guide)

## **ACCESSORIES (Not included)**

- Power Supply Unit:
  - TT.PR3PRAU6 | 2-Pin AU Power Supply 9W

- Mounting Options:
  - TT.PR5MEC12 | Surface mounting KIT

### **WARRANTY**

2-years limited warranty

