




Teltonika | PR320AUA | 2 Pin AU Power Supply Unit 250W | Suitable for TSW200

Product Images

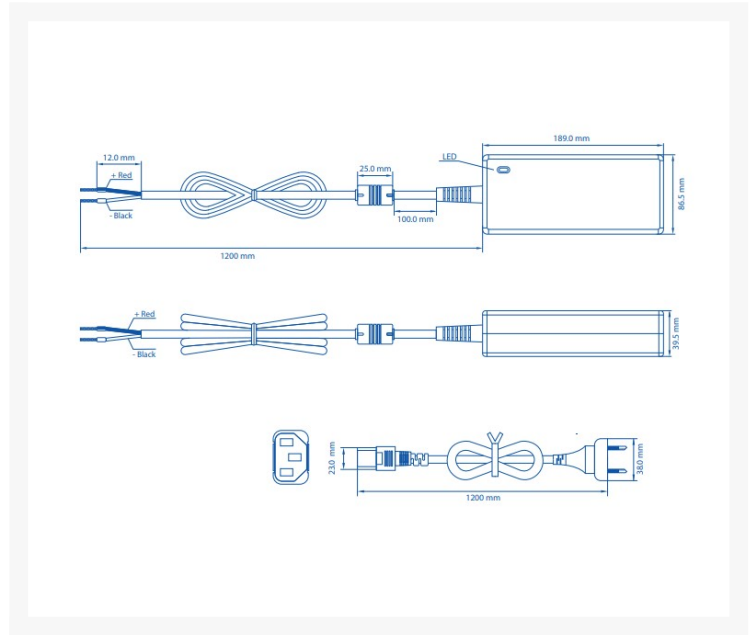

Description

Teltonika | PR320AUA | 2 Pin AU Power Supply Unit 250W | Suitable for TSW200

The PR320AUA is designed to be used with the [TSW200](#). It has an AU plug and support input voltage from 100 VAC to 240VAC.

SPECIFICATIONS

- **Input voltage:** 100 - 240 VAC
- **Input voltage range:** 90 - 264 VAC
- **Input frequency:** 50/60 Hz
- **Input frequency range:** 47 - 63 Hz
- **Input current:** 3.9 A
- **Maximum input inrush current:** 60 A
- **Input connector:** AU (Type I)
- **Output voltage:** 54 VDC
- **Output voltage absolute maximum:** 51.3- 56.7 VDC
- **Output current:** 4.62 A

- **Output connector:** 2-PIN, with cord end terminals
- **Weight:** 910 g
- **Short circuit protection:** ✓
- **HIPOT (dielectric withstand test):** Primary to Secondary: 1500 VAC
- **Certification:** Safety: IEC62368-1 (CB Scheme), EMC: AS/NZS CISPR 32:2015, EN 55032:2015, EN IEC 61000-3-2:2019, EN 61000-3-3:2013, EN 61000-4-2:2009, EN 61000-4- :2006+A1:2008+A2:2010, EN 61000-4-4:2012, EN 61000-4-5:2014, EN 61000-4-6:2014, EN 61000-4-8:2010, EN 61000-4-11:2004

WARRANTY

2-years limited warranty

