



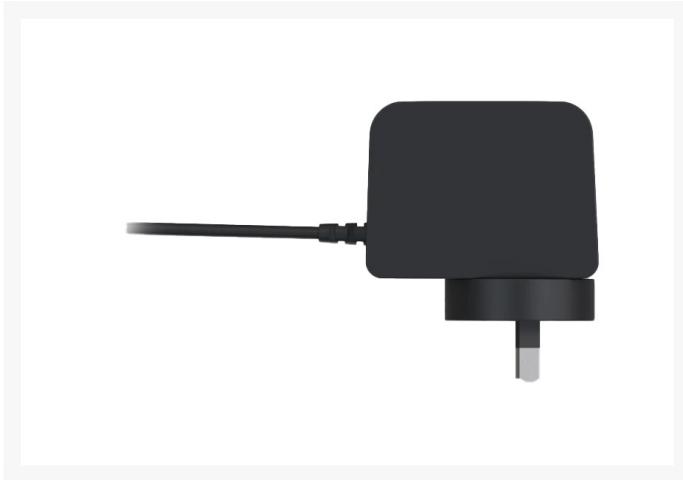

## Teltonika | PR3PUAU3 | 4 Pin Replacement AU Power Supply Unit 9W

### Product Images

---

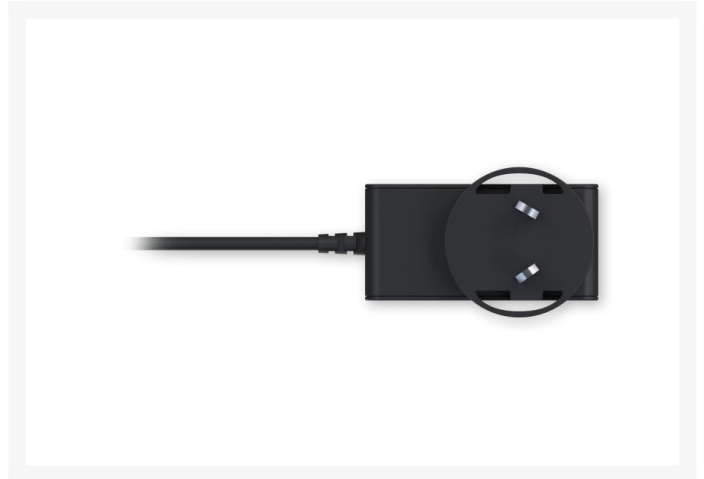

### Description

---

## Teltonika | PR3PUAU3 | 4 Pin Replacement AU Power Supply Unit 9W | Suitable for RUT2xx, RUT9xx, RUT300, TRB14x, TRB500, TSW110

The PR3PUAU3 is designed to be used with the [RUT240AU](#), [RUT241](#), [RUT300](#), [RUT950AU](#), [RUT951](#), [RUT955AU](#), [RUT956](#), [TRB140AU](#), [TRB141](#), [TRB142AU](#), [TRB145AU](#), [TRB500](#) and [TSW110](#). It has an AU plug and supports input voltage from 100VAC to 240VAC.

# SPECIFICATIONS

- **Input voltage:** 100 - 240 VAC
- **Input voltage range:** 90 - 264 VAC
- **Input frequency:** 50/60 Hz
- **Input frequency range:** 47 - 63 Hz
- **Input current:** 0.45 A
- **Maximum input inrush current:** 60 A
- **Input connector:** AU (Type I)
- **Output voltage:** 9 VDC
- **Output voltage maximum deviation:** 8.55 - 9.45 VDC
- **Output current:** 1.0 A
- **Output connector:** 4-PIN, 3 mm pitch
- **Weight:** 80 g
- **Short circuit protection:** ✓
- **HIPOT (dielectric withstand test):** Primary to Secondary: 4000 VDC
- **MTBF:** 30000 h
- **Certification:**  
Safety: AS/NZS 62368-1: 2018, AS/NZS 3112: 2017, IEC 62368-1:2014/A11:2017 (CB Scheme)

EMC: EN 55032:2015, EN 55035:2017, IEC 61000-4-2:2008, IEC 61000-4-3:2006+A1:2007+A2:2010, IEC 61000-4-4:2012, IEC 61000-4-5:2014, IEC 61000-4-6:2013, IEC 61000-4-11:2004, EN 61347-1:2015, EN 61347-2-13:2014/A1:2017, EN 62493:2015

# WARRANTY

2-years limited warranty

