



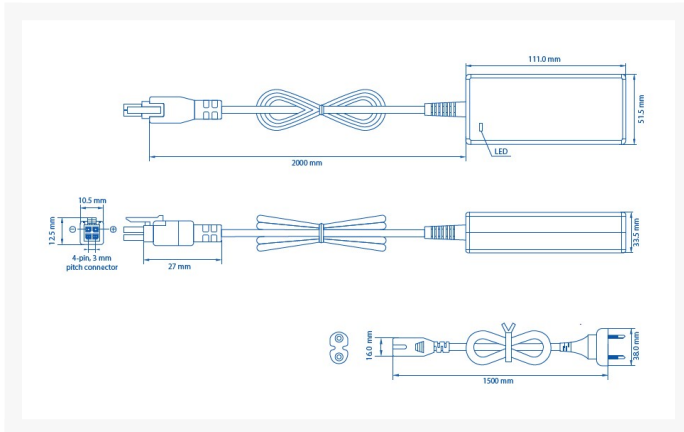

## Teltonika | PR3PWAU3 | AU Power Supply Unit 62W

### Product Images

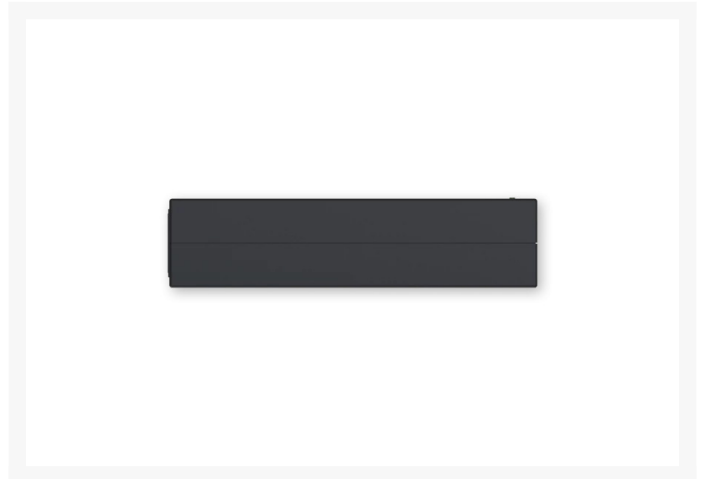

### Description

## Teltonika | PR3PWAU3 | AU Power Supply Unit 62W | Suitable for TSW100

The PR3PWAU3 is designed to be used with the [TSW100](#).

### SPECIFICATIONS

- **Input voltage:** 100 – 240 VAC
- **Input frequency:** 50 / 60 Hz
- **Input current:** 1.5 A

- **Input connector:** AU (Type I)
- **Output voltage:** 48 VDC
- **Output current:** 1.3 A
- **Output connector:** 4-pin, 3 mm pitch
- **Weight:** 360g
- **Input voltage range:** 90 – 264 VAC
- **Input frequency range:** 47 – 63 Hz
- **Maximum input inrush current:** 50 A
- **Output voltage maximum deviation:** 45.6 – 50.4 VDC
- **Standby power:** Yes
- **HIPOT (dielectric withstand test):** Primary to Secondary: 4000 VDC
- **MTBF:** 50000 h
- **PSU efficiency standard:** DoE Level VI
- **Certification:** Safety: AS/NZS 61558.2.16:2010, EMC: AS/NZS CISPR 14.1:2013, EN 55032:2012+AC:2013, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 55024:2010+A1:2015

## WARRANTY

2-years limited warranty

