




Teltonika | PR3PXAU3 | AU Power Supply Unit 18W

Product Images

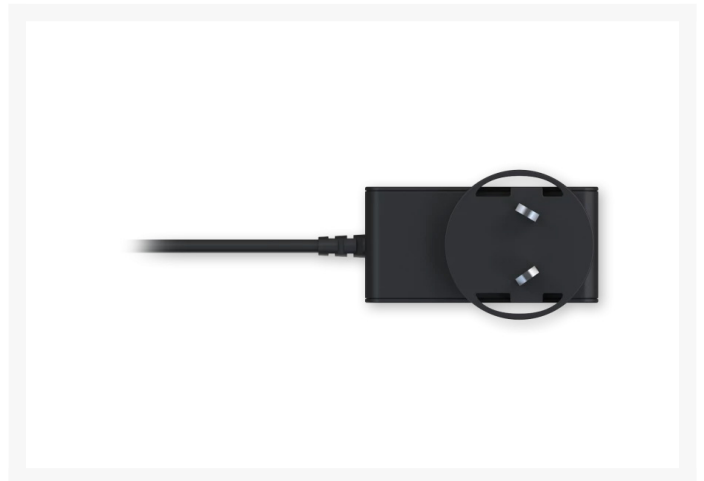

Description

Teltonika | PR3PXAU3 | AU Power Supply Unit 18W | Suitable for RUT360, RUTXxx, RUTXR

The PR3PXAU3 is designed to be used with the [RUT360](#), [RUTX08](#), [RUTX09](#), [RUTX10](#), [RUTX11](#), [RUTX50](#) and [RUTXR1](#).

SPECIFICATIONS

- **Input voltage:** 100 – 240 VAC
- **Input frequency:** 50 / 60 Hz

- **Input current:** 0.6 A
- **Input connector:** AU (Type I)
- **Output voltage:** 12 VDC
- **Output current:** 1.5 A
- **Output connector:** 4-pin, 3 mm pitch
- **Weight:** 89 g
- **Input voltage range:** 90 – 264 VAC
- **Input frequency range:** 47 – 63 Hz
- **Maximum input inrush current:** 60 A
- **Output voltage maximum deviation:** 11.4 – 12.6 VDC
- **Short circuit protection:** Yes
- **HIPOT (dielectric withstand test):** Primary to Secondary: 4000 VDC
- **MTBF:** 30000 h
- **PSU efficiency standard:** DoE Level VI
- **Certification:** Safety: AS/NZS 62368.1:2018, AS/NZS 3112:2017, EMC: AS/NZS CISPR 32:2015, EN 55032:2015, EN 55035:2017, EN 61000-3-2:2019, EN 61000-3-3:2013+A1:2019

WARRANTY

2-years limited warranty

