




Teltonika | PR4MK04K | 4 Pin Plug with Contact Terminals

Product Images

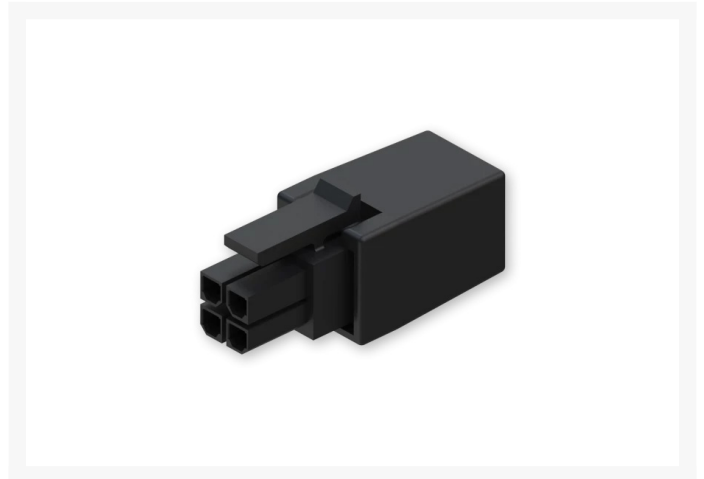

Description

Teltonika | PR4MK04K | 4 Pin Plug with Contact Terminals | Suitable for RUT2xx, RUT3xx, RUT9xx, RUTXxx, TRB14xx, TRB500, TSW100, TSW110

The PR4MK04K is designed to be used with the [RUT240AU](#), [RUT241](#), [RUT300](#), [RUT360](#), [RUT950AU](#), [RUT951](#), [RUT955AU](#), [RUT956](#), [RUTX08](#), [RUTX09](#), [RUTX10](#), [RUTX11](#), [RUTX12](#), [RUTX14](#), [RUTX50](#), [RUTXR1](#), [TRB140AU](#), [TRB141](#), [TRB142AU](#), [TRB145AU](#), [TRB500](#), [TSW100](#) and [TSW110](#).

SPECIFICATIONS

- **Voltage rating:** 250 V AC/DC
- **Current rating:** 5 A AC/DC
- **Withstand voltage:** 1500 V AC for 1 minute
- **Insulation resistance:** 1000 M Ω min
- **Temperature range:** - 25 °C ~ + 85 °C
- **Contact resistance:** 10 m Ω
- **Insulator material:** Nylon 66
- **Internal contacts material:** Phosphor Bronze / Brass
- **Internal contacts finishing:** Tin-plated

WARRANTY

2-years limited warranty

