




24 Fibre FOBOT Dome Closure | IP68 Rated

Product Images

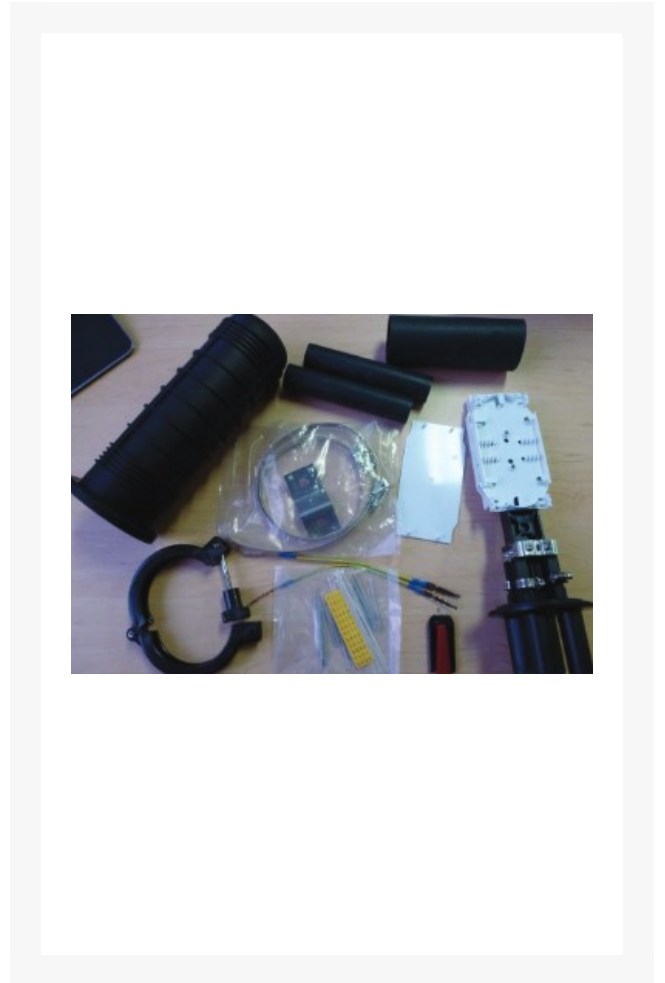

Description

96 Fibre FOBOT Dome Closure | IP68 Rated

Dome Closures are designed to be the perfect re-enterable joining closure for use in Aerial, Pole, Wall Mount and Underground Fibre Optic Splicing applications.

The closure has been made from high quality Poly-Carbonate and features an easy to use clamp with a Silicon Rubber seal entry. The kit also includes all the accessories you need for termination, including Sealant Lined Heat-Shrink Tubing.

SPECIFICATIONS

- **Dimension:** 100 x 340mm
- **Weight:** 1.5kg
- **Cable Diameter:** 7 to 18mm
- **Entry Ports:** 2 in / 3 out
- **IP Rating:** IP68
- **Number of trays:** 2
- **Max number of cores per tray:** 12
- **Max capacity:** 24

CONTENTS

- Splice tray
- Splice protectors
- Nylon cable ties
- Hanging hook
- Branch block
- Marking sticker

WARRANTY

1-year limited warranty

