



4K @60Hz 4 x 1 HDMI® KVM Switch

Product Images



Description

4K @60Hz 4 x 1 HDMI® KVM Switch

Upgrade your audiovisual setup with our 4K @60Hz 4 x 1 HDMI® KVM Switch. Experience the visual feast of 4K Ultra HD content with resolutions supported up to 4096x2160 @60Hz, immersing yourself in high-definition visuals that greatly enhance your viewing experience.

Our USB 2.0 KVM Switch allows you to conveniently control 4 computers using a single set of keyboard and mouse, sharing one monitor. Save workspace and improve work efficiency by easily and quickly switching between games, movies, TV shows, and other content without the need for frequent plugging and unplugging.

Take control of your setup with multiple control methods including the RS-232 port, remote control, and panel button. Compatible with a wide range of systems like Windows, Mac OS, Android, and Chrome, our KVM switch seamlessly integrates into your existing setup, providing versatile and hassle-free control.

Upgrade your audiovisual system today with our 4K @60Hz 4 x 1 HDMI® KVM Switch. Enjoy stunning visual quality, improved

workspace efficiency, and seamless control. Elevate your audiovisual experience and order now to unlock the full potential of your setup.


FEATURES

- 4096x2160 @60Hz
- HDR
- 4 HDMI In and 1 HDMI Out
- USB2.0 KVM Switch
- EDID Pass-through
- Multiple Control Methods
- Plug and Play
- Metal enclosure


SPECIFICATIONS

Items	Descriptions
HDMI version	HDMI 2.0 (HDR, YUV4:4:4) Compatible with HDCP 2.2, HDCP 1.4
HDMI interface	4 HDMI inputs, 1 HDMI output
Transmission rate	18Gbps
Bandwidth	600MHz
Resolution	4096x2160@24/25/30/50/60Hz, 3840x2160@24/25/30/50/60Hz, 1080i@50/60Hz, 1080p@50/60Hz, 720p@50/60Hz, 576i@50Hz, 576p@50Hz, 480i@60Hz, 480p@60Hz, 3440x1600, 3440x1440, 2560x1600, 2560x1440, 2048x1080, 1920x1440, 2560x1080
Audio format	LPCM7.1/DTS-HD/DTS-Audio/Dolby Digital plus/Dolby TrueHD 7.1/Dolby Digital/Dolby Atmos
RS-232	3 Pin(GND/Rx/Tx), Baud rate 9600
Voltage	DC 5V/1A
Power consumption	<3W
Working temperature	-20°C~60°C
Storage temperature	-30°C~70°C
Humidity	0~90%RH
Housing	Iron
Color	Black
Weight	510g
Dimension	250.0(L) x 80.0(W) x 21.0(H) mm
Protection	ESD protection 1a Contact discharge level 2 (± 4 KV) 1b Air discharge level 3 (± 8 KV) Implementation of the standard: IEC61000-4-2 Lightning protection, Surge protection

Connection

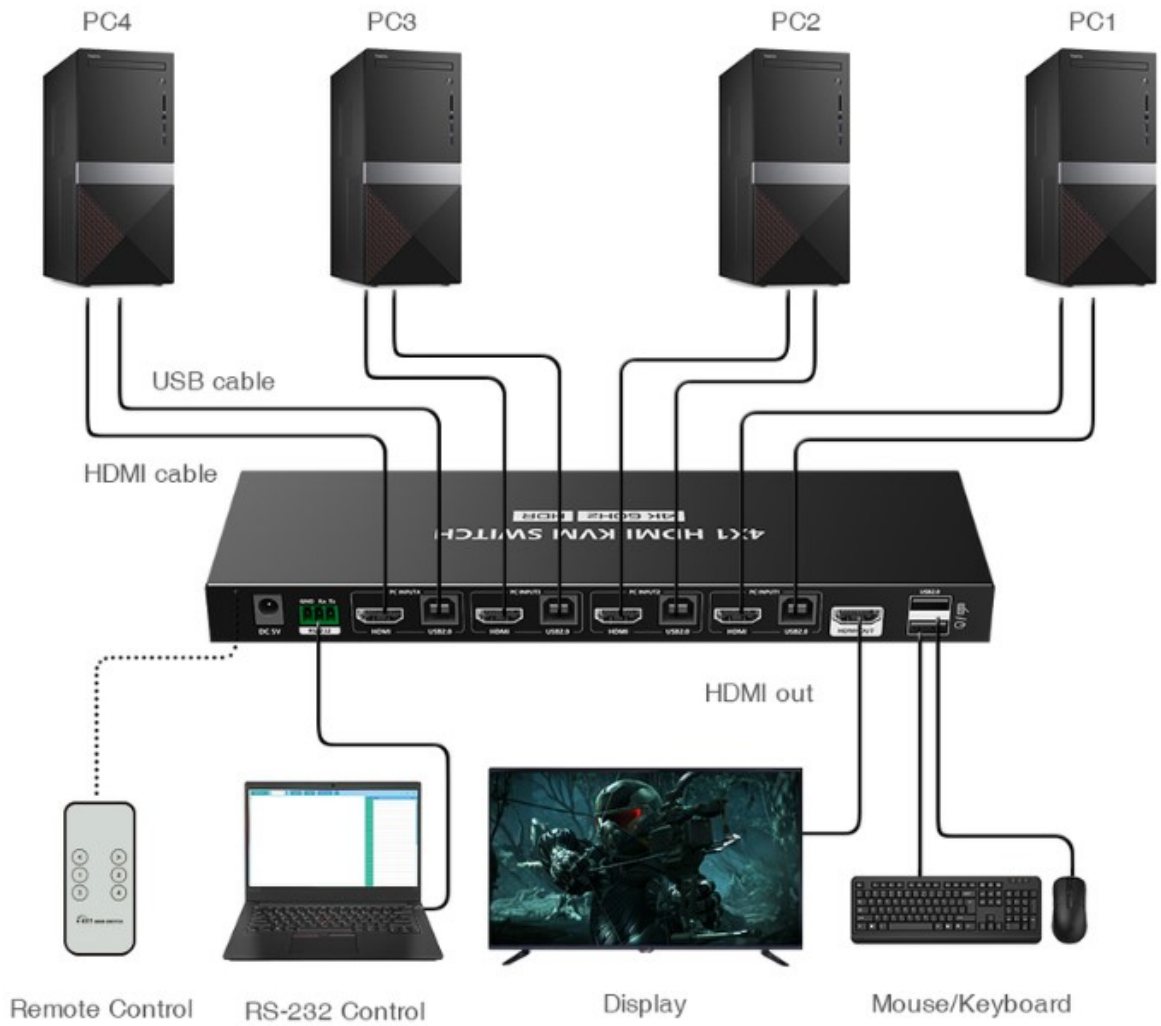

Connection

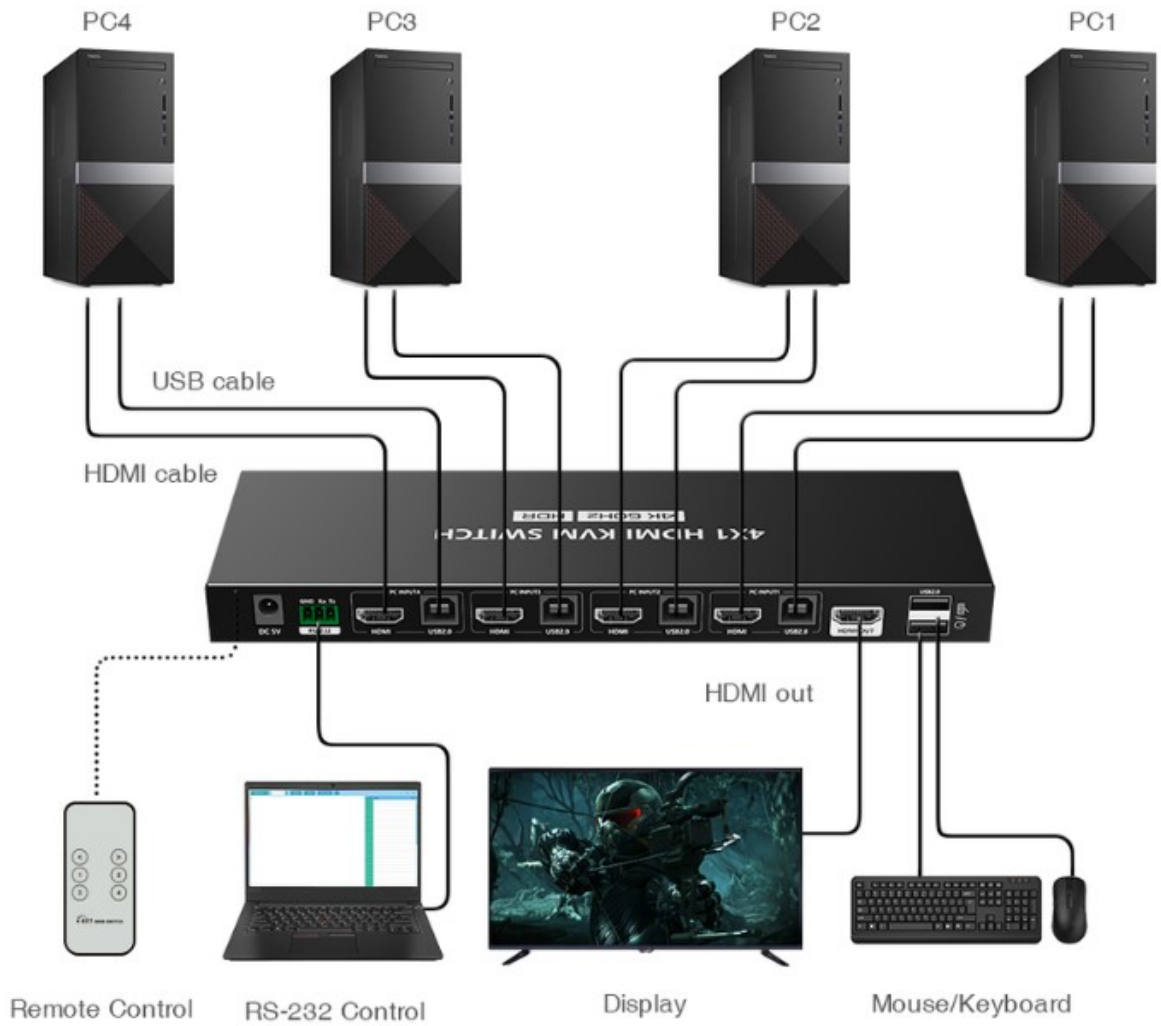

WARRANTY

1-year limited warranty

