




TP-Link | POE380S | Omada 10G PoE++ Injector Adapter

Product Images

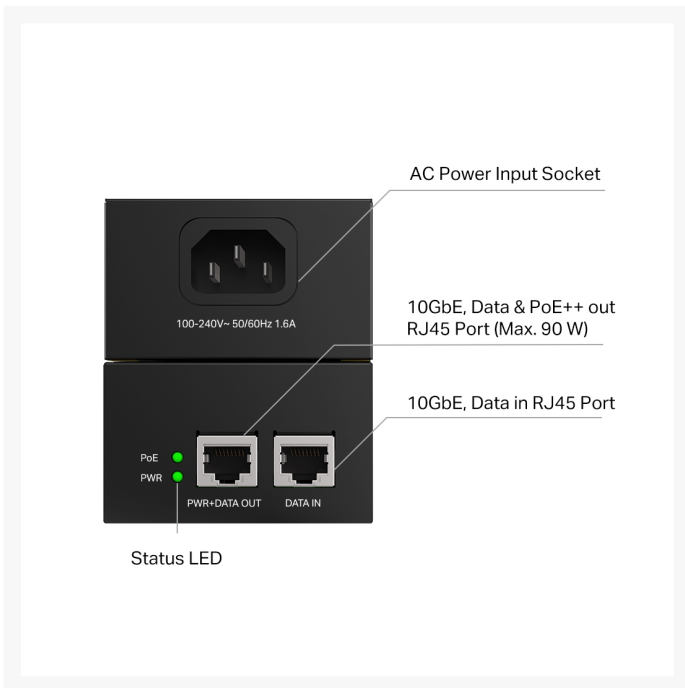

TP-Link | POE380S | Omada 10G PoE++ Injector Adapter

Enhance your network infrastructure with the TP-Link POE380S Omada 10G PoE++ Injector Adapter. Designed to meet the demands of high-speed data transmission, this injector adapter features two 10Gbps/5Gbps/2.5Gbps/1Gbps/100Mbps/10Mbps RJ45 ports, ensuring lightning-fast connectivity. Compliant with IEEE802.3af/at/bt standards, it delivers up to 90W of power, reducing infrastructure costs by transmitting data and power simultaneously through a single Ethernet cable. With its advanced auto-sensing algorithm, versatile installation options, and plug-and-play functionality, this injector adapter provides seamless integration into your network setup. Whether you're upgrading your current network infrastructure or setting up a new one, the TP-Link POE380S offers reliability, efficiency, and performance you can trust.

FEATURES

- 2x 10Gbps/5Gbps/2.5Gbps/1Gbps/100Mbps/10Mbps RJ45 ports ensure faster transmission
- Complies with IEEE802.3af/at/bt standards, supplies up to 90W
- Reduces infrastructure costs by transmitting data and power simultaneously via an Ethernet cable
- Automatically determines and supplies the exact power to meet the device's need
- Wall-mounting and desktop design accommodates most installation scenarios
- Plug & Play installation, no configuration required
- Integrated power supply
- Durable metal casing

SPECIFICATIONS

- **Dimensions (W x D x H):** 155 x 70 x 42mm
- **Standards and Protocols:** IEEE802.3i, IEEE802.3u, IEEE802.3ab, IEEE802.3af, IEEE802.3at, IEEE802.3bt*
- **Network Media:**
 - 10BASE-T: UTP category 3, 4, 5 cable (max. 100m)
EIA/TIA-568 100Ω STP (maximum 100 m)
 - 100BASE-TX: UTP category 5, 5E cable (max. 100m)
EIA/TIA-568 100Ω STP (max. 100m)
 - 1000BASE-T: UTP category 5, 5E, 6 cable (max. 100m)
- **Ports:**
 - 1x RJ45 data-in port
 - 1x RJ45 power+data-out port (Max. 90W)
 - 1x AC socket
- **Power Consumption:**
 - Input: 100-240V, 50/60Hz, 1.6A
 - Output: Auto-determine the necessary power requirements (max. 90W)
- **Basic Function:**
 - Auto-Sensing Algorithm enables providing power with 802.3af/at/bt* PD
 - Auto-determine the necessary power requirements
 - Wall-mounting and desktop installation supported
 - Plug-and-Play
- **LED:** Power / PoE
- **Certification:** FCC, CE, RoHS

*POE380S is incompatible with Passive PoE and other non-standard PoE devices. The standards refer to IEEE 802.3af/at/bt.

WARRANTY

3-years warranty

