




Teltonika | PR2PP10B | 1m 4 Pin to 4 Pin Power Cable

Product Images

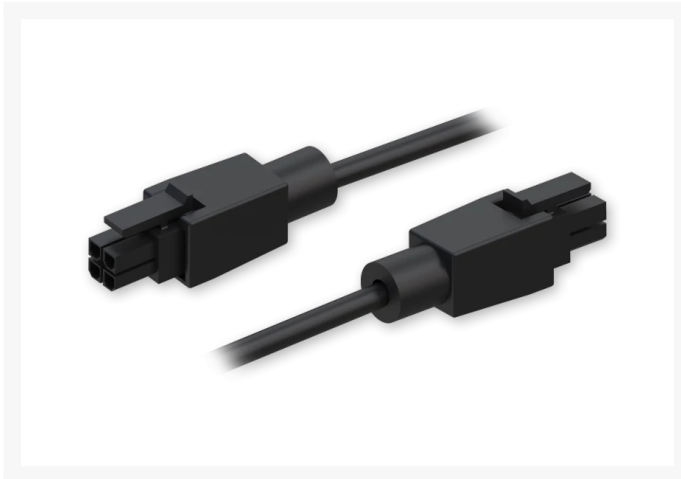

Description

Teltonika | PR2PP10B | 1m 4 Pin to 4 Pin Power Cable | Suitable for RUT2xx, RUT3xx, RUT9xx, RUTXxx, TRB14x, TRB500, TSW1xx

Upgrade your connectivity with the Teltonika PR2PP10B 1m 4 Pin to 4 Pin Power Cable. Designed for compatibility with a wide range of Teltonika devices including [RUT240AU](#), [RUT241](#), [RUT300](#), [RUT360](#), [RUT951](#), [RUT955AU](#), [RUT956](#), [RUTX08](#), [RUTX09](#), [RUTX10](#), [RUTX11](#), [RUTX12](#), [RUTX14](#), [RUTX50](#), [RUTXR1](#), [TRB140AU](#), [TRB141](#), [TRB142AU](#), [TRB145AU](#), [TRB500](#), [TSW100](#), [TSW110](#), this power cable ensures reliable power transmission for uninterrupted performance.

Enhance the power connectivity of your Teltonika devices with the PR2PP10B Power Cable, ensuring efficient and reliable performance for your network infrastructure.

SPECIFICATIONS

- **Input connector:** 4-pin, 3mm pitch
- **Input voltage max:** 30 VDC
- **Output connector:** 4-pin, 3mm pitch
- **Conductor cross-section:** Stranded, cross-section 4 x 0.20 mm² (24 AWG)
- **Cable outer diameter:** 4.5mm
- **Maximum current:** 2A
- **Weight:** 47g
- **Total Length:** 1000mm
- **Protection material:** PVC 60P BLACK
- **Flammability rating:** UL 94 V-2
- **RoHS:** Compliant
- **REACH:** Compliant

WARRANTY

2-years limited warranty

