




## OE Elsafe | PICCOLO 250270 | Piccolo TUF-HP 72W Charger with PSU and 1000mm GST08 Cable | WHITE

### Product Images

---

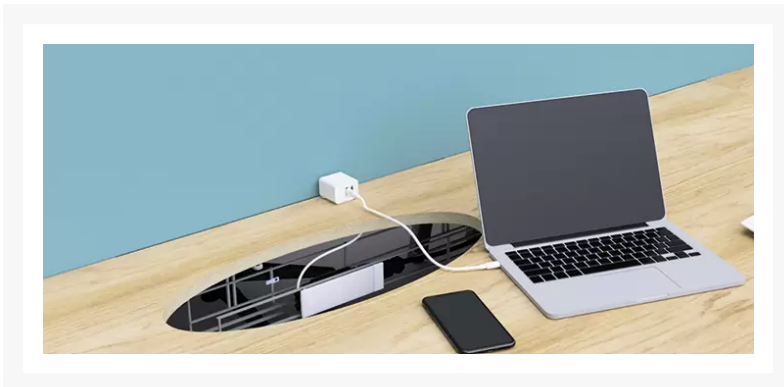

### Description

---

## OE Elsafe | PICCOLO 250270 | Piccolo TUF-HP 72W Charger with PSU and 1000mm GST08 Cable | WHITE

Introducing the Elsafe PICCOLO 250270, your go-to solution for high-powered USB charging in any workspace. Designed for ease of installation and compact yet powerful performance, the Piccolo TUF-HP Charger with PSU and GST08 Cable is a game-changer. Also available in black (PICCOLO 250271), it seamlessly integrates into any workspace, ensuring power accessibility wherever you need it. Say goodbye to cumbersome charging solutions and hello to seamless power accessibility right at your fingertips.

Upgrade your charging experience with the Piccolo TUF-HP Charger, where innovation meets efficiency for seamless power delivery anytime, anywhere.

## FEATURES

- TUF-HP USB Type C fast laptop charging
- Unique Reversible Type A port for quick connections
- Multiple mounting options for versatility
- High strength fire retardant polycarbonate construction ensures durability
- Available in a clean and modern white colour
- GST08 male to female interconnect cable for power cord options
- Quality tested with ISO9001 standards
- Visual configuration and appearance for optimum aesthetics
- Output voltage and resistance of USB charger ensures efficient charging

## MOUNTING OPTIONS

Piccolo must be paired with the QF30 PSU power supply and a GST08 lead. The QF30 PSU can be discreetly fitted under the desk, into cabinetry, or clipped into the OE Elsafe Prodigy cable Basket.

## SPECIFICATIONS

- **Model:** PICCOLO 250270
- **Colour:** White
- **Weight:** 800g
- **USB Charging Outlets:** 1 x Type C (Reversible), 1 x Type A (Reversible)
- **Power In connector:** 65mm Male GST08 DC connector
- **Rated Total Output Power:** 72W MAX
- **Output Voltages & Currents:**
  - Type C: MAX 60W 20V/3A, 15V/3A, 9V/3A, 5V/3A (PD3.0), QC 2/3.0 5V/3A, 9V/2A, 12V/1.5A
  - Type A: MAX 12W 5V / 2.4A IDR BC1.2, Apple 12W Mode Samsung Fast Charge
- **Input Voltage:** 24 - 30V DC
- **USB Connector Min. Insertions:** Type A 10,000, Type C 10,000
- **Over Current Protection:** Yes, with digital control at 3.3A and auto reset with LED flash
- **Short Circuit Protection:** Yes, with digital control at 3.3A and auto reset
- **Over Temperature Protection:** Auto Power Reduction to PD 45W Mode, 20V/2.25A, 15V/3A, 9V/3A, 5V/3A
- **Rated Operating Temperature:** 0° to 25°C
- **Certifications - Safety:** IEC 62368-1 : 2018
- **Certification - EMC:** EN61204 : 2018
- **User Replaceable USB module:** No

## WARRANTY

1-year limited warranty

