


4Cabling Pty Ltd ABN 74 123 035 889 4cabling.com.au SALES SUPPORT: 1300 855 235 sales@4cabling.com.au STORE LOCATIONS: Sydney | Melbourne | Brisbane | Perth



10m LC-LC OS1 / OS2 Singlemode Fibre Optic Cable | Yellow

Product Images

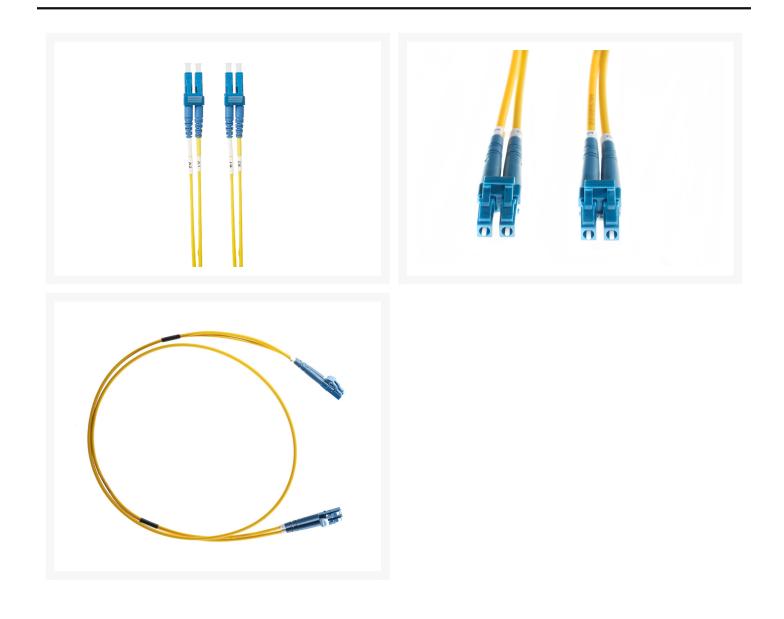

Description

4Cabling 10m LC-LC OS1 / OS2 Singlemode Fibre Optic Cable | Yellow

Fibre patch cables are the thin, flexible fibres of glass that carry data, telephone conversations and emails high speed all over the world in a matter of seconds with much less interference than copper patch lead. Fibre Optic cables need less amplification to boost signals so they travel better over longer distances. 4Cabling 's OS1 / OS2 singlemode fibre optic patch leads provide the connection from Ethernet 10Mbit/s to 10Gbit/s Gigabit Ethernet, they are the cost-effective way to replace your copper-based patch leads. 4Cabling fibre optic cable is immune to EMI/ RFI frequency, mainly used on patch panels for the connection between outlets and terminal equipment. The Singlemode optical fibre cables are manufactured using LSZH cables which conform to IEC, EIA TIA and Telcordia standards.

4Cabling singlemode Fibre Optics leads is the cost-effective way of your cabling solution.

FEATURES

- Conforms to ISO/ IEC 11801
- Individually labelled for lead tracing
- Low smoke zero halogen (LSZH) cable
- Manufactured with stringent quality control
- UPC (Ultra Physical Contact) connector
- All leads are supplied with a factory test report
- OS2 fibre patch leads conform to ITU-T G.652.D, TIA/EIA 492CAAB
- Duplex configurable assemblies for LC, SC, ST & SC/A, as well as MTRJ Patch leads
- All ends are polished and individually inspected for correct polishing
- Supports high-speed multi-channel data, voice & video applications

APPLICATIONS

- Cross-connect patching
- Backbone application in building
- Termination enclosure for equipment patching
- Equipment to equipment patching

SPECIFICATIONS

- Mode: OS1 / OS2 Singlemode
- Fibre Termination: LC-LC
- Length: 10m
- Colour: Yellow
- Oversleeving: 2mm

	Core/Cladding Diameter (µm)	Fast Ethernet 100BASEFX	1 Gigabit 1000BASE-SX	1 Gigabit 1000BASE-LX	10 Gigabit 10GBASE	40 Gigabit 40GBASE	100 Gigabit 100GBASE			
Multimode OM1	62.5/125		275 Meters		33 Meters					
OM2		2000 Meters	550 Meters	550 Meters	82 Meters	N/A				
OM3*	50/125				300 Meters	100 Meters	100 Meters			
OM4*					400 Meters	150 Meters	150 Meters			
Singlemode										
OS1	9/125	2000 Meters	5 km at 1310nm	5 km at 1310nm	10 km at 1310nm					
* Laser Optimised										
Multimode	Core/Cladding Diameter (µm)	Fast Ethernet 100BASEFX	1 Gigabit 1000BASE-SX	1 Gigabit 1000BASE-LX	10 Gigabit 10GBASE	40 Gigabit 40GBASE	100 Gigabit 100GBASE			

	Diameter (µm)	TUUDASEFA	TUUUDASE-SA	TUUUDASE-LA	IUGDASE	40GDADE	TUUGDASE
Multimode							
OM1	62.5/125	2000 Meters	275 Meters	550 Meters	33 Meters	N/A	
OM2	50/125		550 Meters		82 Meters		
OM3*					300 Meters	100 Meters	100 Meters
OM4*					400 Meters	150 Meters	150 Meters
Singlemode							
OS1	9/125	2000 Meters	5 km at 1310nm	5 km at 1310nm	10 km at 1310nm		
* Laser Optimi	sed						



3-years limited warranty

